



INVESTOR IN PEOPLE

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

REC'D 21 JUL 2004

WIPO

PCT

# **PRIORITY DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

5 July 2004

BEST AVAILABLE COPY

## Patents Form 1/77

Patents Act 1977  
(Rule 16)THE PATENT OFFICE  
DL

12 JUN 2003



975\*6679747\*057

13JUN03 E814575-1 C78956

P01/7700 0.00-0313592.8

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## 1. Your reference

SP 2018

## 2. Patent application number

(The Patent Office will fill in this part)

0313592.8

12 JUN 2003

## 3. Full name, address and postcode of the or of each applicant (underline all surnames)

Southampton Photonics Ltd

Phi House

Enterprise Road

Chilworth Science Park

Southampton SO16 7NS

7894330002

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UK

## 4. Title of the invention

Apparatus for providing optical radiation.

## 5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Graham Jones & Company  
77 Beaconsfield Road  
Blackheath  
London

Patents ADP number (if you know it)

SE3 7LG

2097001

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

Claim(s)

Abstract

Drawing(s)

13  
4  
DL  
SONY

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

I/We request the grant of a patent on the basis of this application.

11.

Signature

MP Val

Date 12 June 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Malcolm Varnham 02380 765417

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

0074508 12 JUN 03 07:04



- 2 -

Fibre lasers are typically longer than diode-pumped solid state lasers, and this leads to non-linear limitations such as Raman scattering becoming problematical. It would be advantageous to have fibre lasers that are shorter.

Fibre lasers are typically pumped with diode lasers in bar or stack form. The output from bars and stacks is not ideally matched to the geometry of fibre lasers, leading to a loss in brightness, and thus the need to increase the length of cladding pumped fibre lasers in order to obtain the necessary absorption and output energy.

An aim of the present invention is to provide an apparatus for providing optical radiation that reduces the above aforementioned problems.

#### **Summary of the Invention**

According to a non-limiting embodiment of the present invention, there is provided apparatus for providing optical radiation, which apparatus comprises a pump source for providing pump radiation, and a brightness converter, the apparatus being characterised in that the brightness converter is substantially rigid along at least a portion of its length.

The brightness converter may comprise a core, a first cladding, rare earth dopant, a first end, a second end, and a tapered region located between the first end and the second end, the apparatus being characterised in that the cross-sectional area of the first end is greater than the cross-sectional area of the second end, and the brightness converter is substantially rigid between the first end and the tapered region.

The apparatus is particularly useful for increasing the brightness of the pump radiation via absorption into the rare earth dopant and wavelength conversion into modes guided by the core.

- 3 -

The pump radiation may be coupled from the pump source into the brightness converter using a coupling means. The coupling means may be a lens such as a cylindrical lens.

The apparatus may comprise a first reflector to reflect optical radiation emerging from the first end. The apparatus may also comprise a second reflector.

The pump source may comprise at least one laser diode, laser diode bar, or laser diode stack. Alternatively or additionally, the pump source may include a solid-state laser, a gas laser, an arc lamp, or a flash lamp.

The apparatus may comprise a plurality of pump sources and a combining means to combine the pump radiation emitted by the pump sources. The combining means may comprise a beam splitter, a reflector, a polarisation beam combiner, a beam shaper, or a wavelength division multiplexer.

The brightness converter may have multiple cores, or a single core. The brightness converter may be circular or non-circular. The brightness converter may have a cross-section that is rectangular, is a regular or irregular shaped polygon, or is D-shaped.

The brightness converter may comprise rare-earth dopant disposed in the core and/or the first cladding. The rare earth doping may be selected from the group comprising Ytterbium, Erbium, Neodymium, Praseodymium, Thulium, Samarium, Holmium and Dysprosium, or is Erbium codoped with Ytterbium, or is Neodymium codoped with Ytterbium.

The brightness converter may comprise a second cladding.

The apparatus may comprise a waveguide that is pumped by the brightness converter. The brightness converter may be doped with neodymium and/or

- 4 -

ytterbium. The waveguide may be doped with ytterbium, erbium, or erbium co-doped with ytterbium.

The brightness converter may be defined by a width. The width may be in the range 1mm to 100mm. The width may be in the range 2mm to 25mm. Preferably the width is in the range 5mm to 15mm.

The brightness converter may be defined by a breadth. The breadth may be in the range 1mm to 100mm. The breadth may be in the range 1mm to 25mm. Preferably the breadth is in the range 2mm to 15mm.

The brightness converter may be defined by a length. The length may be in the range 1mm to 2000mm. The length may be in the range 10mm to 200mm. Preferably the length is in the range 10mm to 50mm.

The brightness converter can be formed from an optical fibre preform. The preform can be made from silica, silicic, phosphate or phosphatic glasses. The preform may contain longitudinally extended holes. The preform may include stress rods.

The apparatus may be in the form of a laser, a Q-switched fibre laser, a master oscillator power amplifier, or a laser that contains a frequency converter.

#### **Brief Description of the Drawings**

Embodiments of the invention will now be described solely by way of example and with reference to the accompanying drawings in which:

Figure 1 shows an apparatus for providing optical radiation according to the present invention;

Figure 2 shows an apparatus comprising a plurality of pump sources;

Figures 3 to 5 show examples of brightness converters;

- 5 -

Figure 6 shows an apparatus in which the brightness converter has been drawn down to a fibre;

Figure 7 shows an apparatus comprising a waveguide;

Figure 8 shows an apparatus comprising an intermediate fibre;

Figure 9 shows an apparatus in the form of a Q-switched laser comprising a Q-switch;

Figure 10 shows a cross-section of the brightness converter of Figure 9;

Figure 11 shows apparatus in the form of a master oscillator power amplifier;

Figure 12 shows apparatus in the form of a master oscillator power amplifier (MOPA), which utilizes the brightness converter to pump a waveguide; and

Figure 13 shows apparatus in the form of a laser that comprises a frequency converter within the cavity.



- 6 -

## Detailed Description of Preferred Embodiments of the Invention

With reference to Figure 1, there is provided apparatus for providing optical radiation 10, which apparatus comprises a pump source 1 for providing pump radiation 2, and a brightness converter 3, the apparatus being characterised in that the brightness converter 3 is substantially rigid along at least a portion of its length.

The brightness converter 3 may comprise a core 4, a first cladding 31, rare earth dopant 5, a first end 6, a second end 7, and a tapered region 8 located between the first end 6 and the second end 7, the apparatus being characterised in that the cross-sectional area of the first end 6 is greater than the cross-sectional area of the second end 7, and the brightness converter 3 is substantially rigid between the first end 6 and the tapered region 8.

The apparatus is particularly useful for increasing the brightness of the pump radiation 2 via absorption into the rare earth dopant 5 and wavelength conversion into modes guided by the core 4.

The pump radiation 2 may be coupled from the pump source 1 into the brightness converter 3 using a coupling means 9. The coupling means 9 may be a lens such as a cylindrical lens.

The apparatus may comprise a first reflector 11 to reflect optical radiation 10 emerging from the first end 6. The apparatus may also comprise a second reflector 12. Advantageously, the second reflector 12 can be configured to reflect optical radiation 10 emerging from the second end 7. The first and second reflectors 11, 12 may form a laser cavity 13. Preferably the reflectivity of the first reflector 11 is greater than the reflectivity of the second reflector 12 at the wavelength of the optical radiation 10. The first reflector 11 can be a mirror, a dichroic mirror, a dielectric

- 7 -

mirror, a reflector or a grating. The second reflector 12 can be a mirror, a dichroic mirror, a dielectric mirror, a reflector, a grating, a Bragg grating such as a fibre Bragg grating, or be formed by the few percent reflection from a dielectric (such as glass) and air interface.

The pump source 1 can be a laser diode, a laser diode bar, or a laser diode stack. Alternatively or additionally, the pump source 1 can be a solid-state laser, a gas laser, an arc lamp, or a flash lamp.

Figure 2 shows apparatus in the form of a laser 20. The laser 20 comprises three pump sources 1, a combining means 21 and a coupling means 22. The coupling means 22 may be a lens such as a cylindrical lens. The combining means 21 can be a beam splitter.

The combining means 21 may contain reflectors to combine the pump radiation 2 from a plurality of pump sources 1. The combining means 21 may be a beam splitter, the pump sources 1 may be laser diode stacks, and the reflector may be a striped reflector for interleaving the pump radiation 2 from the laser diode stacks.

The combining means 21 can be or can include a polarisation beam combiner, which is advantageous for polarisation multiplexing.

The combining means 21 and/or the coupling means 22 can also include one or more beam shapers such as are described in United States patents 5243619, 5557475, 5825551, 6005717, 6151168, 6229940, 6240116, RE 33722, which patents are hereby incorporated herein.

The combining means 21 can be or can include a wavelength division multiplexer configured to combine the pump radiation 2 from two pump sources 1 having different wavelengths.

- 8 -

Beam combining, interleaving, polarisation multiplexing, and wavelength division multiplexing can be used to couple the pump radiation 2 from two to four, or more, pump sources 1 into the beam combiner 3.

Figures 3, 4 and 5 show examples of the cross-sections at the first end 6 of the beam combiner 3. The brightness converter 3 can have multiple cores 4, or a single core 4. Although the brightness converter 3 can be circular, a non-circular cross-section can provide greater coupling between cladding modes and modes guided in the cores 4 as is described more fully in United States patent 4815079 which is hereby incorporated by reference herein. The brightness converter 3 can have a cross-section that is rectangular, is a regular or irregular shaped polygon, is D-shaped. The refractive index of the core 4 is preferably greater than the refractive index of the first cladding 31. The rare-earth dopant 5 can be disposed in the core 4 and/or the first cladding 31. The rare earth doping 5 may be selected from the group comprising Ytterbium, Erbium, Neodymium, Praseodymium, Thulium, Samarium, Holmium and Dysprosium, or is Erbium codoped with Ytterbium, or is Neodymium codoped with Ytterbium. The brightness converter 3 may include a second cladding 51 as shown with reference to Figure 5. The refractive index of the second cladding 51 is preferably lower than the refractive index of the first cladding 31. The second cladding 51 may be a polymer.

Figure 6 shows an apparatus in the form of a laser 60 in which the brightness converter 3 is drawn down to a fibre 61. The second reflector 12 is configured as a fibre Bragg grating 62 written in at least one of the core 4 or first cladding 31. An end cap 63 is shown in order to expand the optical radiation 10 prior to it leaving the fibre 61. This is advantageous to reduce the probability of damage at the fibre / air interface. A heat sink 66 is also shown for removal of heat from the brightness

converter 3. The heat sink 66 can be air cooled or water cooled. Preferably the heat sink 66 is configured to provide two dimensional contact with the surface of the brightness converter 3. This can be achieved if the brightness converter 3 contains at least one flat surface as would be provided for example by the cross-sections shown in Figures 3 to 5.

Figure 7 shows an apparatus in the form of a laser 70 in which the laser 60 is used to pump a waveguide 71 that comprises at least one core 75, at least one cladding 76, and a gain medium 77. The gain medium 77 can comprise at least one rare-earth dopant disposed in one or both of the core 75 and cladding 76. The laser 60 can be replaced with the apparatus shown by reference to Figure 1. The waveguide 71 can be core pumped or cladding-pumped. Core and cladding pumped fibre lasers are described further in United States patents 4815079, 6288835 and 6445494, which are hereby incorporated herein by reference. The waveguide 71 is shown coupled to the laser 60 by a splice 72. Alternatively, lenses can be used to couple the laser 60 to the waveguide 71. The waveguide 71 is shown as having a first and second fibre Bragg grating 73, 74 in order to form a laser cavity 78.

Figure 8 shows an apparatus in the form of a laser 80 that comprises an intermediate fibre 81 for transmission of the optical radiation 10 from the laser 60 to the waveguide 71. This is a particularly useful arrangement for use in materials processing applications (such as welding, drilling and cutting) because it allows separation of the pump source 1 from the waveguide 71 which can be located on, or in the vicinity of, a machine tool.

Figure 9 shows an apparatus in the form of a Q-switched laser 90 which comprises a plurality of laser diode modules 91 providing pump radiation 2 in optical fibre bundles 92. The pump radiation 2 from the fibre bundles 92 is imaged onto the

brightness converter via the lenses 93, the dichroic mirror 94 and the Q-switch 95. The Q-switch 95 can be an acousto-optic modulator or an electro-optic modulator. The brightness converter 3 is formed from an optical fibre preform that has been necked down in to form the taper 8. The first end 6 preferably includes anti-reflection coating. The second end 7 has a fibre Bragg grating 96 to reflect the laser radiation 10. The fibre bundles 92 can be replaced by individual fibres or lenses.

Figure 10 shows a cross-section 100 of the first end 7 of the brightness converter 3 with the pump radiation 2 from the fibre bundles 92 that have been imaged onto its surface shown as individual spots having a diameter 105. The laser diode module 91 can be a FAP-B-60C-1200-BL Fiber Array Packaged Bar from Coherent, Inc. which can provide 60W continuous wave power at 810nm with a beam diameter of 1.2mm with a numerical aperture of 0.16. Thus 780W of pump radiation can be imaged onto the brightness converter 3 if it has cross-sectional dimensions of width 101 of 10mm and breadth 102 of 5mm. If made using optical fibre preform technology, such a preform can be tapered down by a factor of around 100 (in linear dimensions) thus providing an output fibre having dimensions of 100µm by 50µm. Referring to Figure 9, with dopant concentrations of rare-earths (such as Neodymium) of a few mole %, and utilizing either large cores 4 or multiple cores 4 (see Figures 3 to 6), good absorption of the pump radiation 2 is possible in lengths 98 of untapered preform 99 of 1cm to 10cm, but preferably 2cm to 5cm. Higher launched power can be achieved by imaging the pump radiation 2 from more laser diode modules 91 onto the first end 7 in smaller spots (with higher numerical apertures).

With practical preform technologies, the width 101 can be in the range 1mm to 100mm, the breadth in the range 1mm to 100mm, and the length 98 in the range 1mm to 2000mm. The technology lends itself to immediate application with the width 101

- 11 -

in the range 2mm to 25mm, breadth 102 in the range 1mm to 25mm, and length 99 in the range 10mm to 200mm. Preferably, the width 101 will be in the range 5mm to 15mm, breadth 102 in the range 2mm to 15mm, and length 99 in the range 10mm to 50mm. The ratio of linear cross-sectional dimensions of the first end 6 to the second end 7 can be in the range 2 to 1000, and preferably in the range 10 to 250. By width 101 and breadth 102, it is meant two representative cross-sectional measures across the cross-section 100. Note that the cross-section 100 can be rectangular, circular, square, D-shaped, or other regular or irregular shape. The preform can be made from silica, silicic, phosphate or phosphatic glasses. The preform may contain longitudinally extended holes (not shown) along its length as are found in microstructured fibres, or stress rods such as are those used for inducing birefringence.

Figure 11 shows apparatus in the form of a master oscillator power amplifier (MOPA) 110 comprising a seed source 111 and a beam splitter 112. The beam splitter 112 is preferably dichroic. The seed source 111 may be a laser such as a fibre laser, a Q-switched laser, a pulsed laser, a femtosecond laser, or a semiconductor laser. The MOPA 110 is shown with the seed source 111 providing laser radiation 113 directed at the second end 7. This has the advantage that the brightness converter 3 will be less multi-moded at the second end 7 than the first end 6.

Figure 12 shows apparatus in the form of a master oscillator power amplifier (MOPA) 120, which utilizes the brightness converter 3 to pump the waveguide 71. The brightness converter 3 may be doped with neodymium and/or ytterbium such that low-brightness 810nm radiation is converted into laser radiation 10 having a higher brightness in a wavelength range that is absorbed by ytterbium (for example in the wavelength range 910nm to 1050nm, but preferably from 910nm to 920nm, 975 to

- 12 -

980nm, or 1030nm to 1050nm). The waveguide 71 may be doped with ytterbium that is pumped by the laser radiation 10. This arrangement is advantageous for core-pumping the waveguide 71 because it allows higher output powers to be achieved before reaching non-linear effects.

Figure 13 shows apparatus in the form of a laser 130 that comprises a frequency converter 131 within the cavity 133 formed by the first reflector 11 and the second reflector 12. The frequency converter 131 may be a frequency doubler, a frequency tripler or a frequency quadrupler. The brightness converter 3 may be doped with neodymium and/or ytterbium, the first and second reflectors 11, 12 may be such that they reflect at the fundamental wavelength of the laser 130 (typically from 910nm to 1100nm), and the frequency converter 131 may utilize a crystal such as barium titanate or lithium niobate for the frequency conversion.

The examples provided in Figures 9 to 13 were based on fibre coupled laser modules 92. The brightness converters 3 described in these examples are also suited for simple coupling to either laser diode bars or laser diode stacks. These can be combined together or used separately, and can be continuous wave or pulsed. Examples are continuous wave laser diode stacks and bars with output powers of 10W to 1kW or more, and laser diode stacks that can instantaneous pulsed powers in excess of 1kW or more. The laser diode stacks or bars can be water cooled and/or air cooled.

It is to be appreciated that the embodiments of the invention described above with reference to the accompanying drawings have been given by way of example only and that modifications and additional components may be provided to enhance performance. In addition, the invention can be considered to be a laser, a Q-switched

12-JUN-2003 THU 18:03

SOUTHAMPTON PHOTONICS

FAX NO. 02380760311

P.

- 13 -

fibre laser, a master oscillator power amplifier, or a laser that contains a frequency converter.

The present invention extends to the above-mentioned features taken in isolation or in any combination.



- 14 -

**Claims**

1. Apparatus for providing optical radiation, which apparatus comprises a pump source for providing pump radiation, and a brightness converter, the apparatus being characterised in that the brightness converter is substantially rigid along at least a portion of its length.
2. Apparatus according to claim 1 wherein the brightness converter comprises a core, a first cladding, rare earth dopant, a first end, a second end, and a tapered region located between the first end and the second end, the apparatus being characterised in that the cross-sectional area of the first end is greater than the cross-sectional area of the second end, and the brightness converter is substantially rigid between the first end and the tapered region.
3. Apparatus according to claim 1 or claim 2 wherein the pump radiation is coupled from the pump source into the brightness converter using a coupling means.
4. Apparatus according to claim 3 wherein the coupling means is a lens.
5. Apparatus according to any one of the preceding claims wherein the apparatus comprises a first reflector to reflect optical radiation emerging from the first end.
6. Apparatus according to any one of the preceding claims and including a second reflector.
7. Apparatus according to any one of the preceding claims wherein the pump source comprises at least one laser diode, laser diode bar, or laser diode stack.
8. Apparatus according to any one of the preceding claims wherein the pump source includes a solid-state laser, a gas laser, an arc lamp, or a flash lamp.

- 15 -

9. Apparatus according to any one of the preceding claims wherein the apparatus comprises a plurality of pump sources and a combining means to combine the pump radiation emitted by the pump sources.
10. Apparatus according to claim 9 wherein the combining means comprises a beam splitter, a reflector, a polarisation beam combiner, a beam shaper, or a wavelength division multiplexer.
11. Apparatus according to any one of the preceding claims wherein the brightness converter contains a plurality of cores.
12. Apparatus according to any one of claims 1 to 10 wherein the brightness converter contains a single core.
13. Apparatus according to any one of the preceding claims wherein the brightness converter is circular.
14. Apparatus according to any one of claims 1 to 12 wherein the brightness converter is non-circular.
15. Apparatus according to any one of the preceding claims wherein the brightness converter comprises rare-earth dopant.
16. Apparatus according to claim 15 wherein the rare earth doping is selected from the group comprising Ytterbium, Erbium, Neodymium, Praseodymium, Thulium, Samarium, Holmium and Dysprosium, or is Erbium codoped with Ytterbium, or is Neodymium codoped with Ytterbium.
17. Apparatus according to any one of the preceding claims wherein the brightness converter comprises a second cladding.
18. Apparatus according to any one of the preceding claims wherein the brightness converter is doped with neodymium and/or ytterbium and the waveguide is doped with ytterbium, erbium, or erbium co-doped with ytterbium.

- 16 -

19. Apparatus according to any one of the preceding claims wherein the brightness converter is defined by a width, and wherein the width is in the range 1mm to 100mm.
20. Apparatus according to claim 19 wherein the width is in the range 2mm to 25mm.
21. Apparatus according to claim 20 wherein the width is in the range 5mm to 15mm.
22. Apparatus according to any one of the preceding claims wherein the brightness converter is defined by a breadth, and wherein the breadth is in the range 1mm to 100mm.
23. Apparatus according to claim 22 wherein the breadth is in the range 1mm to 25mm.
24. Apparatus according to claim 23 wherein the breadth is in the range 2mm to 15mm.
25. Apparatus according to any one of the preceding claims wherein the brightness converter is defined by a length, and wherein the length is in the range 1mm to 2000mm.
26. Apparatus according to claim 25 wherein the length is in the range 10mm to 200mm.
27. Apparatus according to claim 26 wherein the length is in the range 10mm to 50mm.
28. Apparatus according to any one of the preceding claims wherein the brightness converter is formed from an optical fibre preform.
29. Apparatus according to claim 26 wherein the preform is made from silica, silicic, phosphate or phosphatic glass.

- 17 -

30. Apparatus according to claim 28 or claim 29 wherein the preform contains longitudinally extended holes.
31. Apparatus according to claim 30 wherein the preform includes stress rods.
32. Apparatus according to any one of the preceding claims and in the form of a laser, a Q-switched fibre laser, a master oscillator power amplifier, or a laser that contains a frequency converter.
33. Apparatus substantially as herein described with reference to the accompanying drawings.

1 / 5

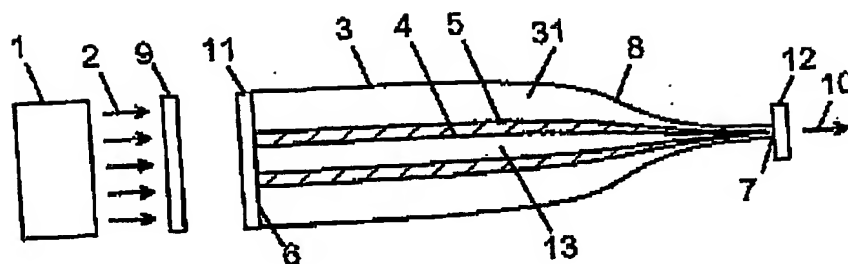


Fig 1

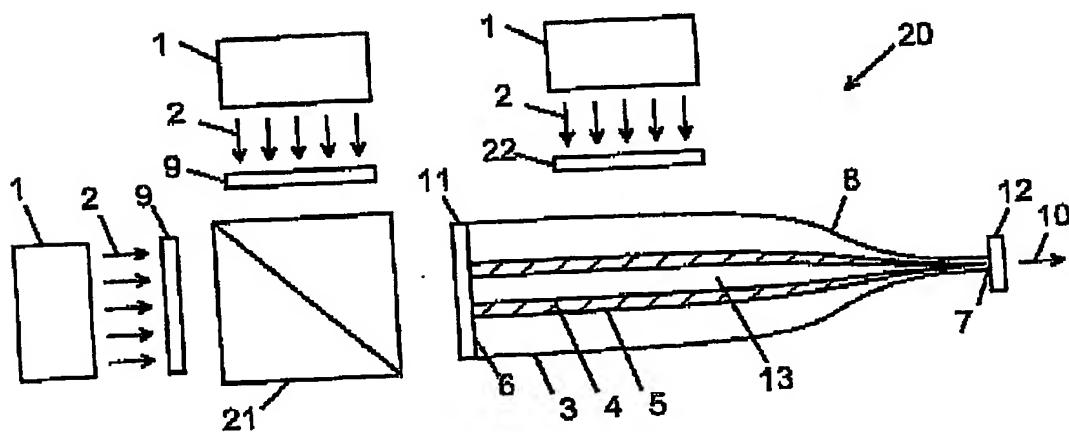


Fig 2

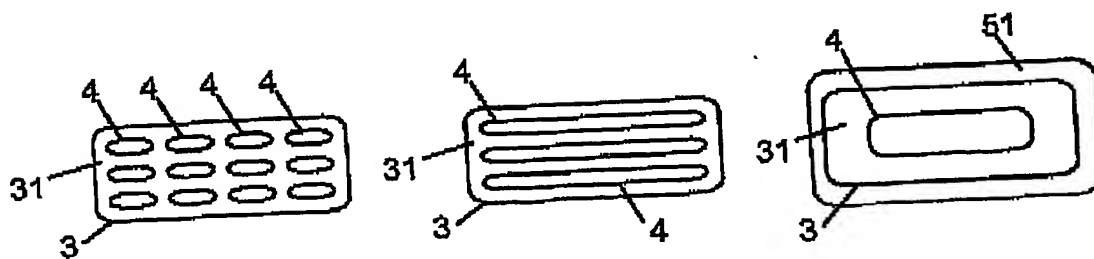


Fig 3

Fig 4

Fig 5

2 / 5

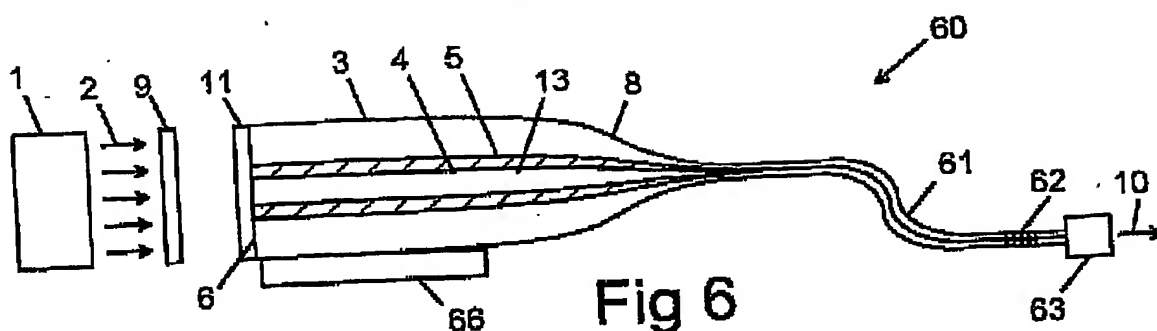


Fig 6

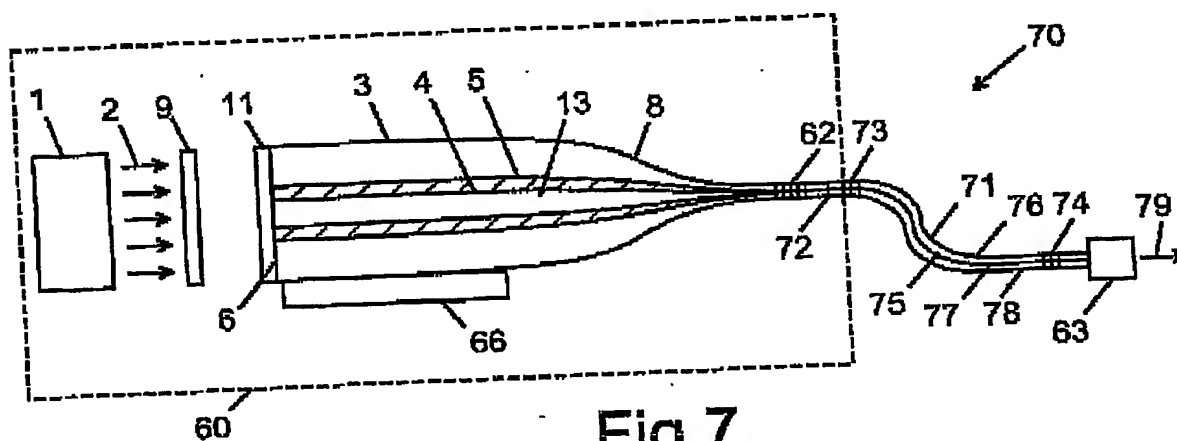


Fig 7





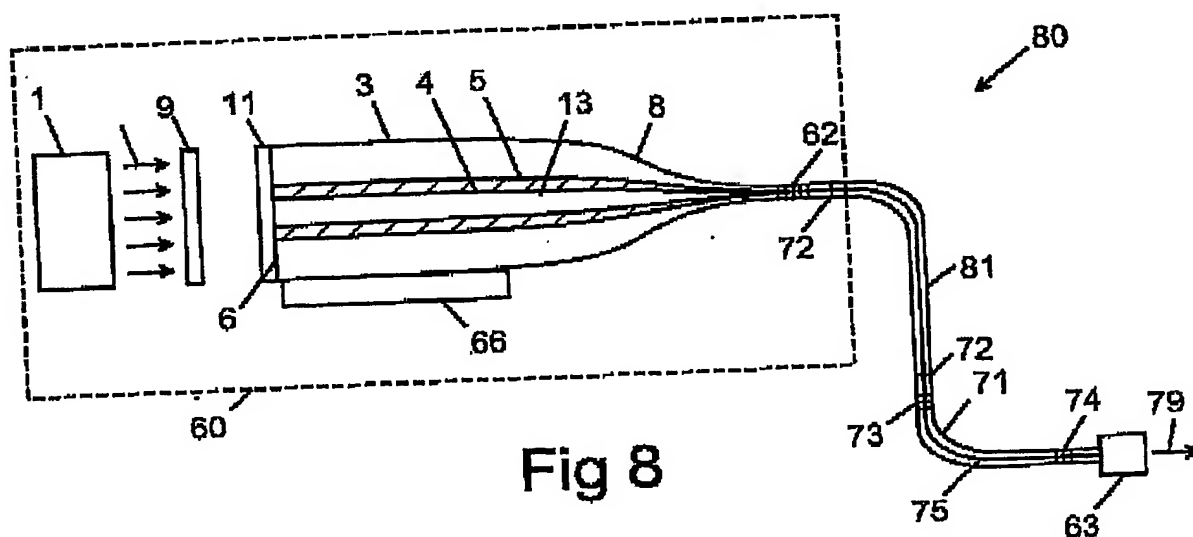


Fig 8

3 / 5

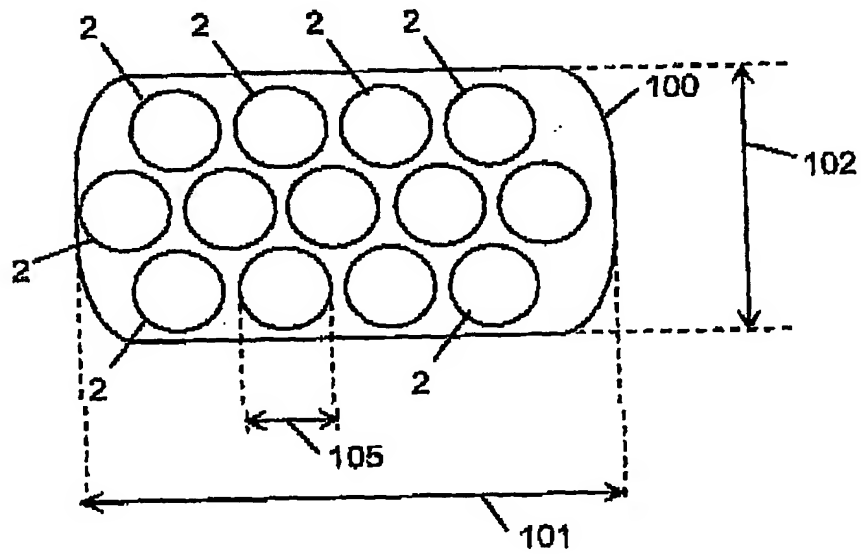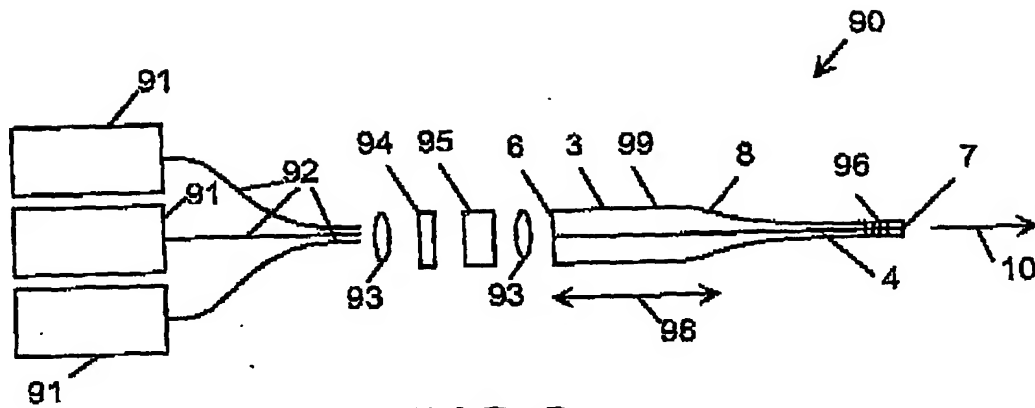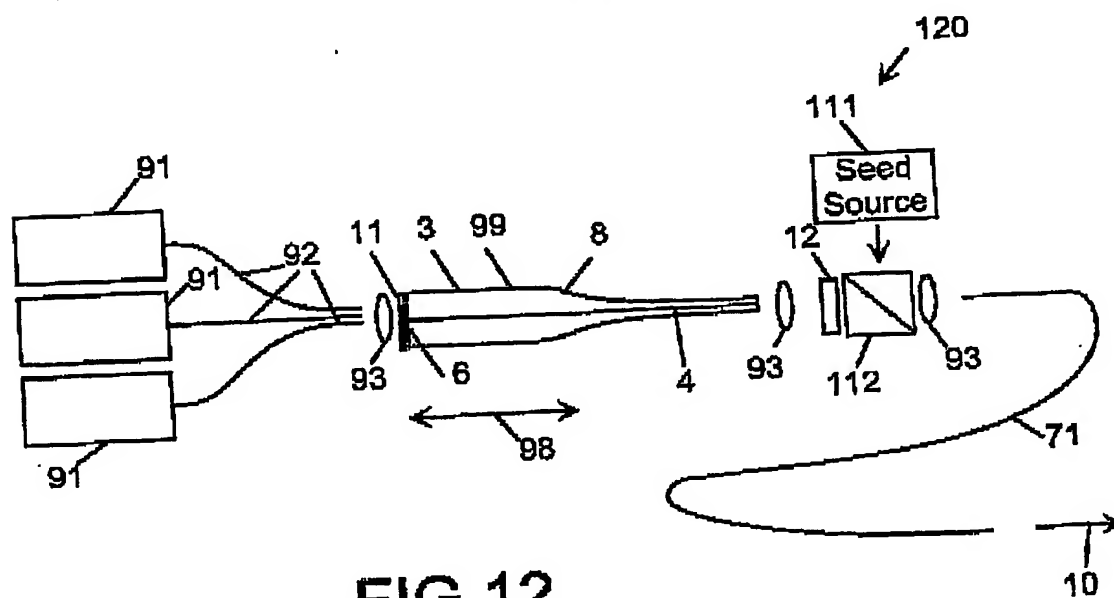

4 / 5

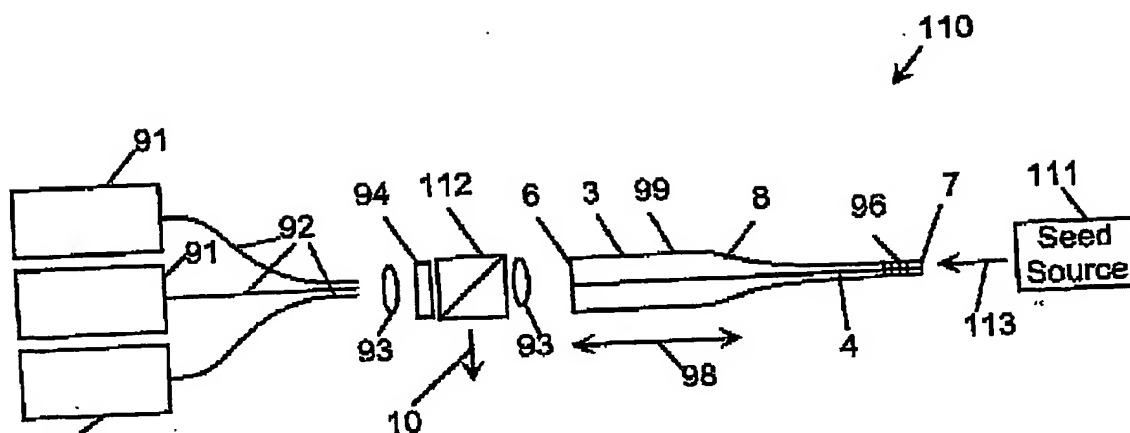



5 / 5

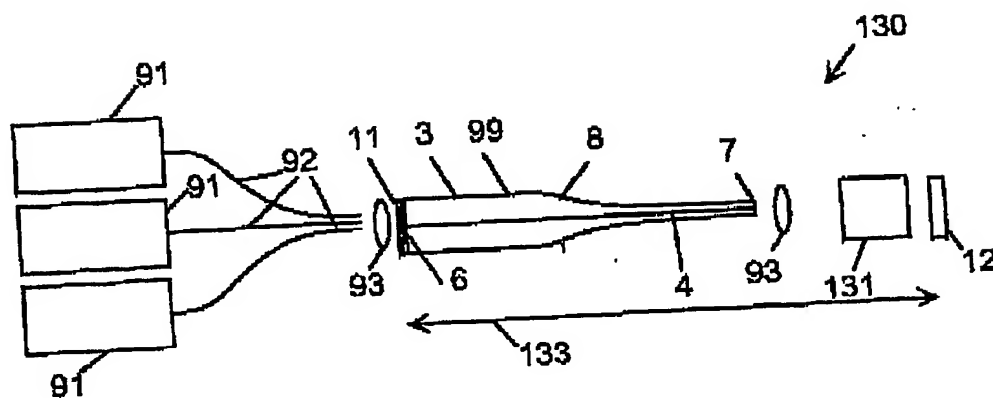


FIG 13